

## HPTV2408, HPTV2408CB, HPTV2408-1, HPTV2408-1CB, HPTV2408300, HPTV2408300CB


### CCTV Power Supply and Distribution Units

#### Description


The HPTV2408, HPTV2408CB, HPTV2408-1 and HPTV2408-1CB are CCTV power supply and distribution units. The HPTV2408 and HPTV2408CB provide a constant source of 24 VAC with 4.0 A supply current. The HPTV2408-1 and HPTV2408-1CB provide a constant source of 24 VAC with 8.0 A supply current. Eight individual outputs route power to operate CCTV cameras and other video accessories. For overload protection, the HPTV2408 and HPTV2408-1 use automotive style fuses, while the HPTV2408CB and HPTV2408-1CB have auto-resettable PTC circuit breakers.

#### Benefits

- An all-in-one power supply and distribution unit enclosed in roomy cabinet.
- Transformer thermal protection limits damage from overloaded circuits.
- LED lights for quick and easy diagnosis, troubleshooting, and status indication.
- Comes fully assembled with accessories included for quick installation.
- Enclosure built for durability and product life.
- Power disconnect switch for easy servicing.
- Power cord included; three conductors for ground safety convenience.

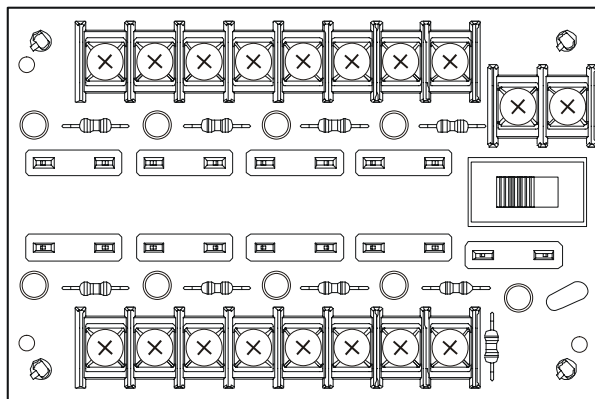

HPD8

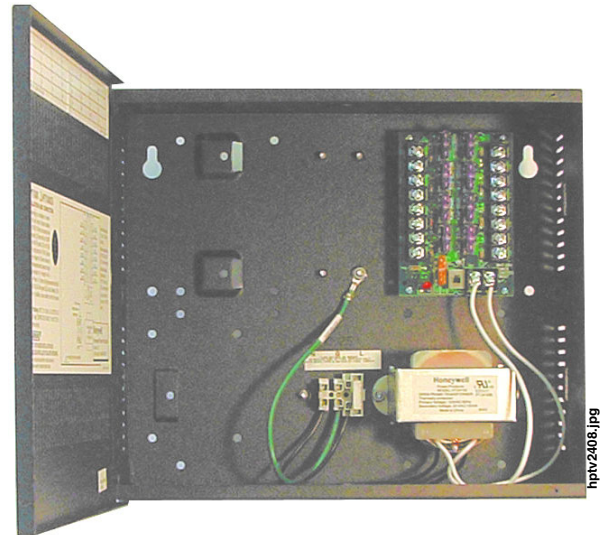

#### Ordering Information

Product	Description
HPTV2408	24 VAC @ 4.0 A with 8 fused outputs.
HPTV2408CB	24 VAC @ 4.0 Amps with 8 PTC protected outputs.
HPTV2408-1	24 VAC @ 8 A with 8 fused protected outputs.
HPTV2408-1CB	24 VAC @ 8.0 A with 8 PTC outputs.
HPTV2408300	24/28 VAC @ 12.5/10.0 A with 8 fused outputs.
HPTV2408300CB	24/28 VAC @ 12.5/10.0 A with 8 PTC outputs.

#### Specifications

- Input 115 VAC, 60 Hz, 0.9 A for HPTV2408(CB). HPTV2408-1(CB) have 1.8 A input; HPTV2408300(CB) have 3.6 A input.
- Output:  
HPTV2408(CB) have 4.0 A, 100 VA supply current.  
HPTV2408-1(CB) have 8.0 A, 200 VA supply current).  
HPTV2408300(CB) have 24/28 VAC, 12.5/10.0 A output.
- Eight electronically regulated outputs. Fuses are rated 3.0 A and PTC circuit breakers are rated 2.5 A.
- Input and output surge and transient protection.
- Transformer has built-in thermal protection.
- AC power LED indicator.
- Individual LED indicators for each output indicate blown fuse.
- Power disconnect switch.
- Cord set included.
- Unit maintains camera synchronization.
- Hinged cover and vented enclosure with five convenient knockouts.
- Temperature range: -4°F to 95°F (-20°C to 35°C); indoor use only.
- Cabinet dimensions:  
10.0" H x 11.5" W x 4.875" D  
(cm: 25.4 H x 29.21 cm W x 12.38 cm).

---

This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.  
©2010 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.

## Automation and Control Solutions

Honeywell

12 Clintonville Road

Northford, CT 06472-1610

[www.honeywellpower.com](http://www.honeywellpower.com)

1(877) HPP-POWR

[hpp\\_techserv@honeywell.com](mailto:hpp_techserv@honeywell.com)

DH-1015:B  
May 2010  
Made in the U.S.A.  
© U.S. Registered Trademark  
© 2010 Honeywell International Inc.  
Page 2 of 2



# Honeywell