

HPTV2404WP-2, HPTV2804WP-2


Power Supplies

Description

HPTV2404WP-2 and HP2804WP-2 power supplies provide power for applications such as access control, security, and CCTV applications that require outdoor installation. The HPTV2404WP-2 provides a non-power-limited output of 24 VAC @ 8.0 A, and the HPTV28100WP provides 28 VAC @ 6.25 A of continuous supply current. Each unit consists of a thermally-fused transformer and an electrically-fused primary input in a NEMA 4X IP66 weatherproof enclosure with included mounting hardware.

Benefits

- LED lights for quick diagnosis, troubleshooting and status indication.
- Product reliability enhanced through built in protection and quality.
- Comes fully assembled with accessories for quick installation.
- Product built for durability and long life.

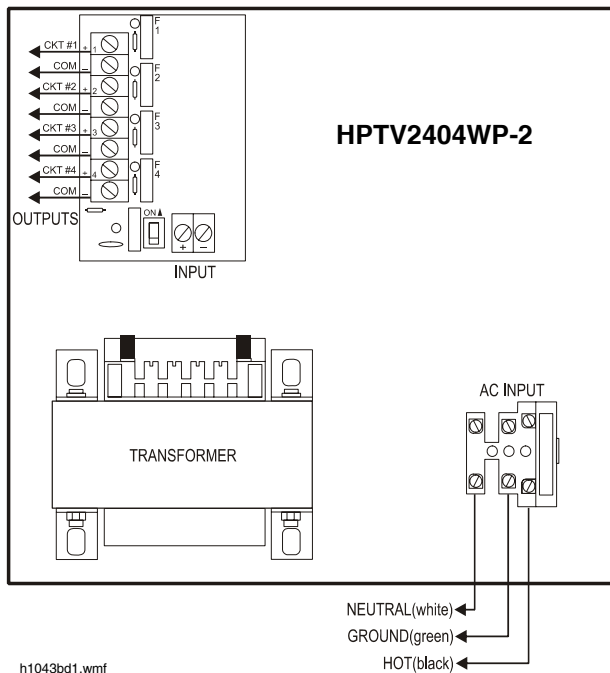

Specifications

- Temperature range: -40° F to 120° F (-40° C to 49° C); outdoor use.
- Enclosure dimensions: 12.50" H x 11.50" W x 7.25" D (cm: 31.75 H x 29.21 W x 18.42 D).

HPTV2404WP-2

- Input: 115 VAC, 60 Hz, 1.73 A.
- Output: 24 VAC, 60 Hz, 8.0A.
- Fuse ratings:
 - AC terminal block: 3.0 A, 5 x 20 mm, 250 VAC.
 - Output circuit board (main fuse): 10.0 A, 32 V standard automotive fuse.
 - Output circuit fuse board: 3.0 A, 32 V standard automotive fuses per each output circuit (4 per HPTV2404WP-2).

HPTV2804WP-2

- Input: 115 VAC, 60 Hz, 1.52 A.
- Output: 28 VAC, 60 Hz, 6.25 A.
- Fuse ratings:
 - AC terminal block: 3.0 A, 5 x 20 mm, 250 VAC.
 - Output circuit board (main fuse): 10.0 A, 32 V standard automotive fuse.
 - Output circuit fuse board: 3.0 A, 32 V standard automotive fuses per each output circuit (4 per HPTV2804WP-2).

This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.
©2009 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.

Automation and Control Solutions

Honeywell

12 Clintonville Road

Northford, CT 06472-1610

www.honeywellpower.com

1(877) HPP-POWR

hpp_techserv@honeywell.com

DH-1043:B
February 2009
Made in the U.S.A.
© U.S. Registered Trademark
© 2009 Honeywell International Inc.
Page 2 of 2



Honeywell