

HPTV2401WPS, HPTV2401WPZ, HPTV2801WPS, HPTV2801WPZ

Weatherproof Power Supplies

Description


These weatherproof power supplies provide power and surge protection for access control, security, and video applications that require outdoor installation. These surge protected power supplies offer superior protections against voltage spikes and transients that can damage or disable expensive and critical equipment.

Benefits

- HPTVWPS has power and video surge protection
- HPTVWPZ has power, video and data surge protection
- An all-in-one power supply and Surge Module enclosed in a large weatherproof NEMA 4 enclosure with ample room for field wiring.
- NEMA 4 Enclosure is corrosion resistant with a non-metallic body, lockable stainless steel latches, and brass hardware for outdoor use.
- Transformer thermal protection limits damage from over-loaded circuits.
- AC terminal Block with Fuse protection
- Weatherproof Surge Series limits energy passed downstream on power, data, and video conductors protecting equipment from damage.
- Fully assembled with mounting accessories included for quick installation.
- Mounts with hardware to flat surface, or to pole using optional HPTV-PMK pole-mount kits.

Product Ordering Information

Model	Output Power	VA	Surge Protection
HPTV2401WPS	24VAC @ 8A	200	Power, Video
HPTV2401WPZ	24VAC @ 8A	200	Power, Video, Data
HPTV2801WPS	28VAC @ 6.25A	175	Power, Video,
HPTV2801WPZ	28VAC @ 6.25A	175	Power, Video, Data

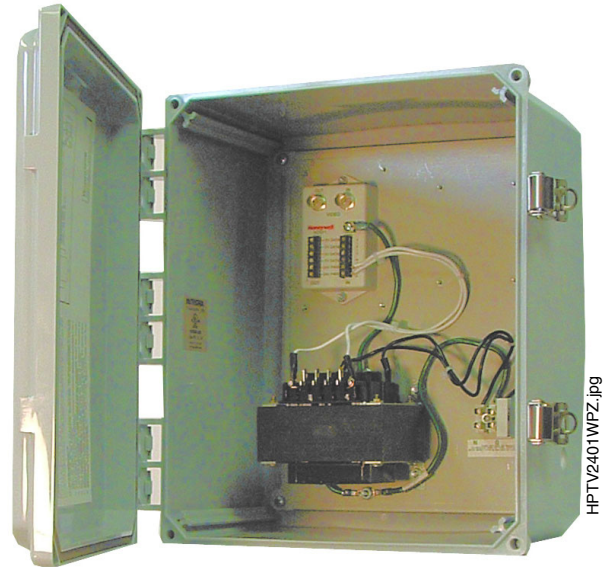

HPTV2401WPZ

Specifications

- **Input:** 115 V, 60 Hz, 2.0 A.
- **Output:**
 - HPTV2401WPS: 8.0 A @ 24VAC (200VA).
 - HPTV2401WPZ: 8.0 A @ 24VAC (200VA).
 - HPTV2801WPS: 6.25A @ 28VAC (175VA).
 - HPTV2801WPZ: 6.25A @ 28VAC (175VA).
- Equipped with surge protection. For surge protector specifications, refer to the installation guide.
- Transformer with built-in thermal protection.
- Fuse AC Terminal block with quick disconnect
 - Input fuse rating: 3.0 A, 250 V (5 x 20 mm).
- Designed for quick installation.
- NEMA 4X IP66 weatherproof enclosure with mounting hardware included.
- **Temperature range:** –40°F to 120°F (–40°C to 49°C); indoor and outdoor use.
- **Weatherproof enclosure dimensions:** 14" H x 11.5" W x 7.25" D (cm: 35.36 H x 29.21 W x 18.42 D).